



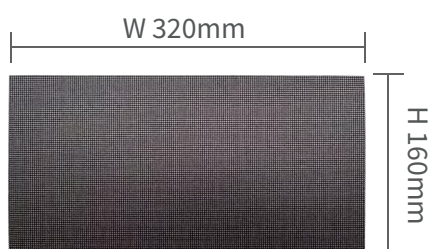

LED INTEGRATED SOLUTIONS

Outdoor fixed installation

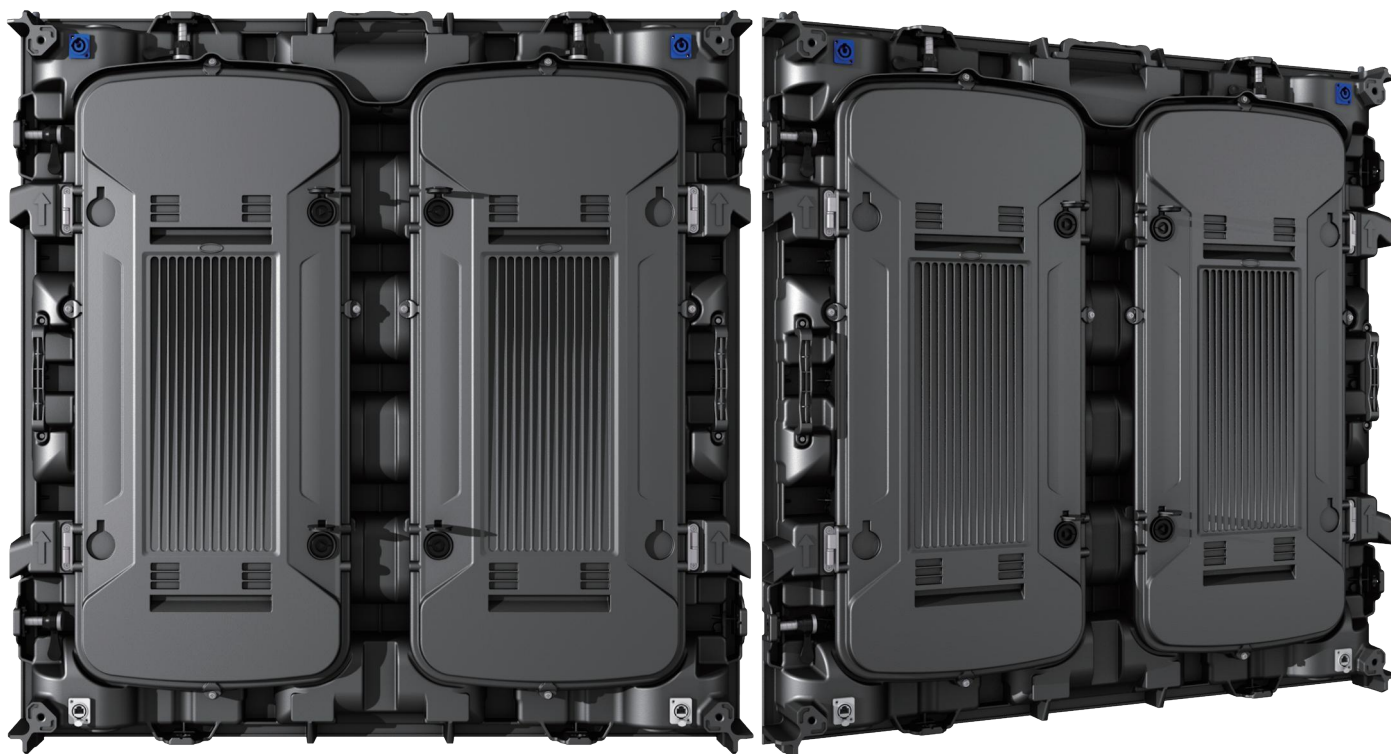

Key Features

- ◆ Affordable version for fast ROI.
- ◆ Die-casting Aluminum module for fast heat dissipation.
- ◆ IP66 waterproof and 5VB fireproof.
- ◆ Totally front or rear service.
- ◆ Stable and reliable performance.

Standard Dimension: 960x960x101mm

Optional Dimensions: 960x640mm/960x1,280mm
1,440x960mm/1,440x640mm

Pixel pitch: 6.67mm, 8mm, 10mm

Applications: Digital signage, billboard, road sign, stadium scoreboards, building facade, etc.

Outdoor configuration	PH3.3	Ph4	PH5
Pixel Pitch(mm)	3.3	4	5
Driving Method	1/12	1/10	1/8
Pixel Density(dots/sQM)	91828	62500	40000
LED type	SMD1415	SMD1921	SMD1921
Module Resolution(pixels)	96*48	80*40	64*32
Module size(mm)	320*160	320*160	320*160
Cabinet size(mm)	960*960	960*960	960*960
Cabinet weight(KG)	22	22	22
Brightness(Nits)	≥5000	≥5000	≥5000
Refreshment(Hz)	3840	3840	3840
Max power consumption(W/SQM)	560	560	560
Ave Power consumption(W/SQM)	180	180	180
Maintenance type	Front	Front	Front

Outdoor configuration	PH6.67	PH8	PH10
Pixel Pitch(mm)	6.67	8	10 90,000 / SQM.
Driving Method	1/6	1/5	1/2
Pixel Density(dots/sQM)	22500	15635	10000
LED type	SMD2727	SMD3535	SMD3535
Module Resolution(pixels)	48*48	40*40	32*32
Module size(mm)	320*320	320*320	320*320
Cabinet size(mm)	960*960	960*960	960*960
Cabinet weight(KG)	22	22	22
Brightness(Nits)	≥8000	≥8000	≥8000
Refreshment(Hz)	3840	3840	3840
Max power consumption(W/SQM)	560	560	560
Ave Power consumption(W/SQM)	180	180	180
Maintenance type	Front	Front	Front